

# Udel® GF-120

## polysulfone

Udel® GF-120, resin is a 20% glass fiber reinforced polysulfone compound. Glass fiber substantially increases the rigidity, tensile strength, creep resistance, dimensional stability and chemical resistance of the polysulfone resin. The high performance properties and attractive price make these resins particularly effective alternatives to metals in many engineering applications.

- Black: Udel® GF-120 BK 937
- Natural: Udel® GF-120 NT

### General

Material Status	• Commercial: Active	
Availability	• Asia Pacific • Europe	• Latin America • North America
Filler / Reinforcement	• Glass Fiber	
Features	<ul style="list-style-type: none"> <li>• Acid Resistant</li> <li>• Alcohol Resistant</li> <li>• Alkali Resistant</li> <li>• Autoclave Sterilizable</li> <li>• Chemical Resistant</li> <li>• Creep Resistant</li> <li>• E-beam Sterilizable</li> <li>• Ethylene Oxide Sterilizable</li> <li>• Food Contact Acceptable</li> <li>• Good Dimensional Stability</li> <li>• Good Sterilizability</li> </ul>	<ul style="list-style-type: none"> <li>• Good Strength</li> <li>• Heat Sterilizable</li> <li>• High Heat Resistance</li> <li>• High Rigidity</li> <li>• Hydrocarbon Resistant</li> <li>• Hydrolytically Stable</li> <li>• Radiation (Gamma) Resistant</li> <li>• Radiation Sterilizable</li> <li>• Radiotranslucent</li> <li>• Steam Resistant</li> <li>• Steam Sterilizable</li> </ul>
Uses	<ul style="list-style-type: none"> <li>• Appliance Components</li> <li>• Appliances</li> <li>• Automotive Electronics</li> <li>• Bobbins</li> <li>• Dental Applications</li> <li>• Electrical Parts</li> <li>• Electrical/Electronic Applications</li> <li>• Fittings</li> <li>• Food Service Applications</li> </ul>	<ul style="list-style-type: none"> <li>• Hospital Goods</li> <li>• Industrial Parts</li> <li>• Medical Devices</li> <li>• Medical/Healthcare Applications</li> <li>• Microwave Cookware</li> <li>• Piping</li> <li>• Plumbing Parts</li> <li>• Surgical Instruments</li> <li>• Valves/Valve Parts</li> </ul>
Agency Ratings	<ul style="list-style-type: none"> <li>• ISO 10993</li> <li>• NSF STD-51<sup>1</sup></li> </ul>	• NSF STD-61 <sup>2</sup>
RoHS Compliance	• RoHS Compliant	
Appearance	<ul style="list-style-type: none"> <li>• Black</li> <li>• Natural Color</li> </ul>	• Opaque
Forms	• Pellets	
Processing Method	• Extrusion	• Injection Molding

### Physical

	Typical Value	Unit	Test method
Specific Gravity	1.40		ASTM D792
Melt Mass-Flow Rate (MFR) (343°C/2.16 kg)	6.5	g/10 min	ASTM D1238
Molding Shrinkage - Flow	0.30	%	ASTM D955

# Udel® GF-120

polysulfone

<b>Mechanical</b>	<b>Typical Value</b>	<b>Unit</b>	<b>Test method</b>
Tensile Modulus	6000	MPa	ASTM D638
Tensile Strength	96.5	MPa	ASTM D638
Tensile Elongation (Break)	3.0	%	ASTM D638
Flexural Modulus	5520	MPa	ASTM D790
Flexural Strength	148	MPa	ASTM D790

<b>Impact</b>	<b>Typical Value</b>	<b>Unit</b>	<b>Test method</b>
Notched Izod Impact	53	J/m	ASTM D256
Tensile Impact Strength	109	kJ/m <sup>2</sup>	ASTM D1822

<b>Thermal</b>	<b>Typical Value</b>	<b>Unit</b>	<b>Test method</b>
Deflection Temperature Under Load 1.8 MPa, Unannealed	180	°C	ASTM D648

<b>Electrical</b>	<b>Typical Value</b>	<b>Unit</b>	<b>Test method</b>
Volume Resistivity	2.0E+16	ohms·cm	ASTM D257
Dielectric Strength	19	kV/mm	ASTM D149
Dielectric Constant			ASTM D150
60 Hz	3.31		
1 MHz	3.28		
Dissipation Factor			ASTM D150
60 Hz	8.0E-3		
1 MHz	6.0E-3		

<b>Flammability</b>	<b>Typical Value</b>	<b>Unit</b>	<b>Test method</b>
Flame Rating <sup>3</sup> (3.2 mm)	HB		UL 94

# Udel® GF-120


polysulfone

## Injection

## Typical Value Unit

Drying Temperature	149 to 163 °C
Drying Time	3.0 to 4.0 hr
Processing (Melt) Temp	343 to 399 °C
Mold Temperature	121 to 163 °C
Injection Rate	Fast
Back Pressure	0.345 to 0.689 MPa
Screw Compression Ratio	2.0:1.0


## Isothermal Stress vs. Strain (ISO 11403-1)

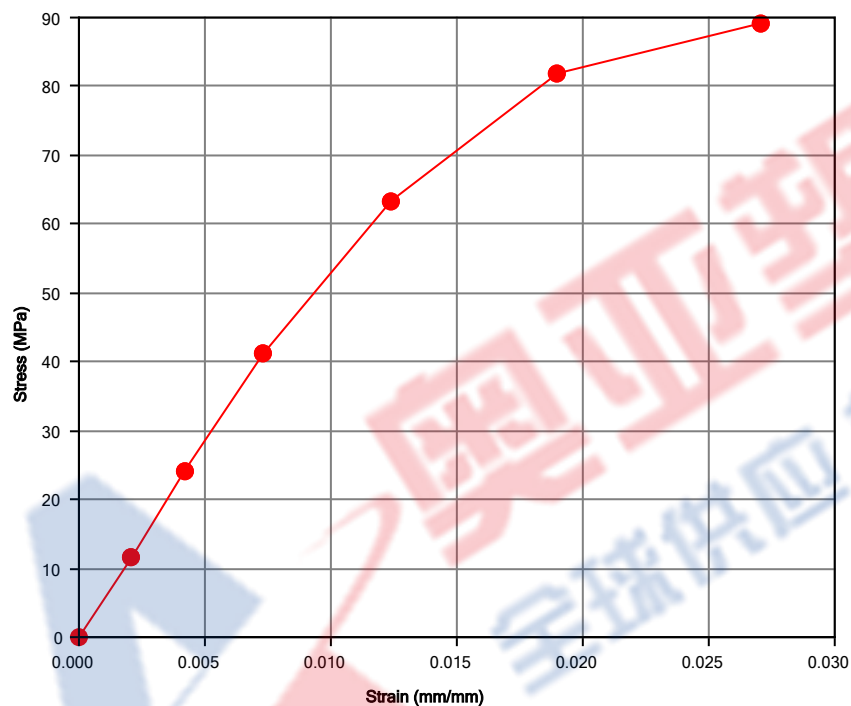


# Udel® GF-120

polysulfone

## Secant Modulus vs. Strain (ISO 11403-1)

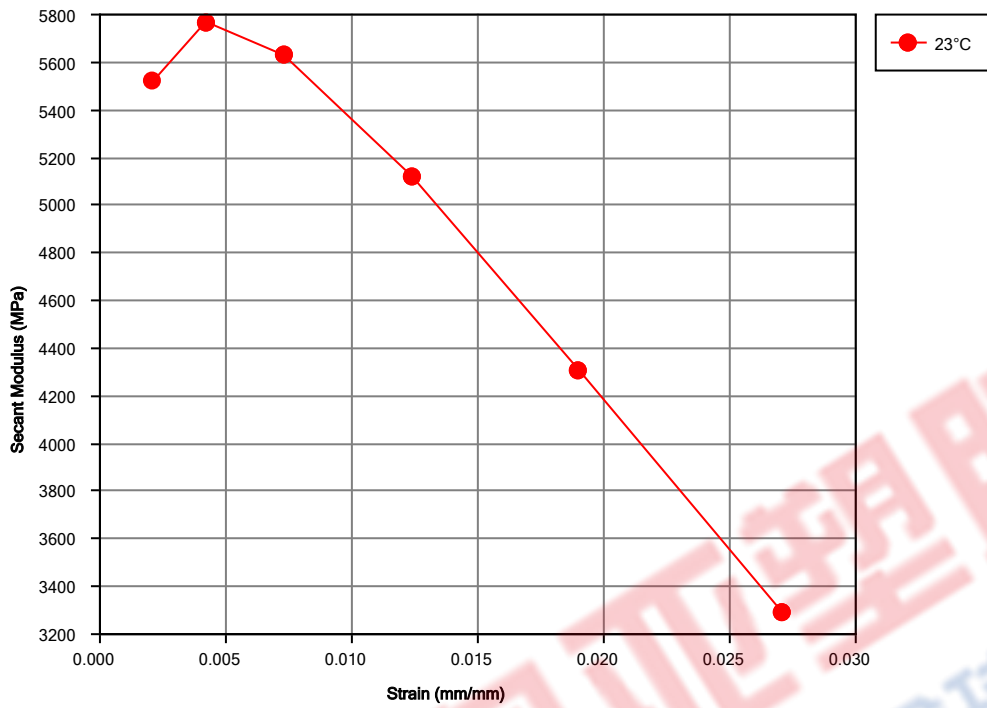

## Viscosity vs. Shear Rate (ISO 11403-2)

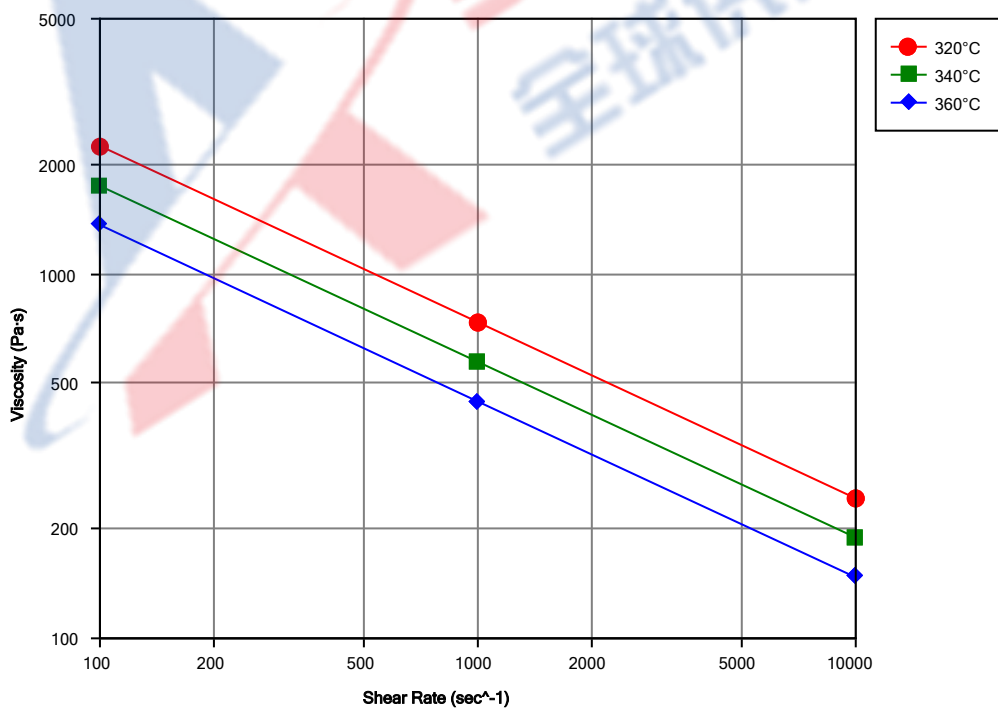

# Udel® GF-120

polysulfone

## Notes

Typical properties: these are not to be construed as specifications.

<sup>1</sup> Maximum Temperature of Use: 149°C (300°F)

<sup>2</sup> Tested at 82 °C (180 °F) (Commercial Hot)

<sup>3</sup> These flammability ratings are not intended to reflect hazards presented by these or any other materials under actual fire conditions.



[www.solvay.com](http://www.solvay.com)

[SpecialtyPolymers.EMEA@solvay.com](mailto:SpecialtyPolymers.EMEA@solvay.com) | Europe, Middle East and Africa

[SpecialtyPolymers.Americas@solvay.com](mailto:SpecialtyPolymers.Americas@solvay.com) | Americas

[SpecialtyPolymers.Asia@solvay.com](mailto:SpecialtyPolymers.Asia@solvay.com) | Asia and Australia

Safety Data Sheets (SDS) are available by emailing us or contacting your sales representative. Always consult the appropriate SDS before using any of our products.

Neither Solvay Specialty Polymers nor any of its affiliates makes any warranty, express or implied, including merchantability or fitness for use, or accepts any liability in connection with this product, related information or its use. Some applications of which Solvay's products may be proposed to be used are regulated or restricted by applicable laws and regulations or by national or international standards and in some cases by Solvay's recommendation, including applications of food/feed, water treatment, medical, pharmaceuticals, and personal care. Only products designated as part of the Solviva® family of biomaterials may be considered as candidates for use in implantable medical devices. The user alone must finally determine suitability of any information or products for any contemplated use in compliance with applicable law, the manner of use and whether any patents are infringed. The information and the products are for use by technically skilled persons at their own discretion and risk and does not relate to the use of this product in combination with any other substance or any other process. This is not a license under any patent or other proprietary right.

All trademarks and registered trademarks are property of the companies that comprise the Solvay Group or their respective owners.

© 2017 Solvay Specialty Polymers. All rights reserved.